

# SRP-330II

3 inch Thermal POS Printer



Retail



Restaurants  
& Bars




Ticketing



Banking

# Durable and Cost-Efficient

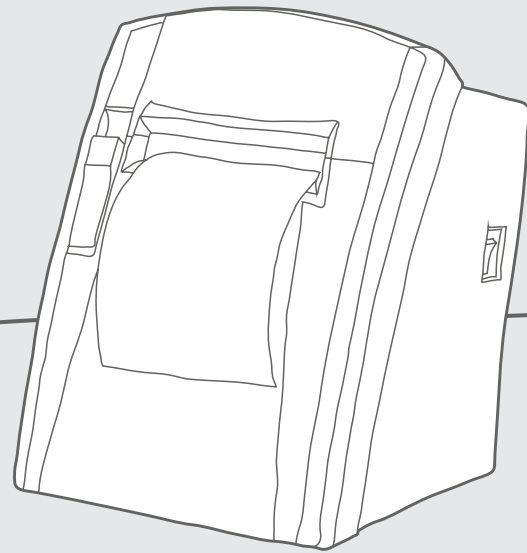

## Cost-Efficiency

- All in one Plus™ Interface
  - Triple Interface  
USB V2.0 FS + Ethernet + Serial
  - Dual Interface  
USB V2.0 FS + Serial  
USB V2.0 FS + Parallel  
USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%


220  
mm/sec

TPH  
150Km



## Reliable Printing Performance

- Printing speed up to 220 mm/sec
- High reliability mechanism :  
150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported



Easy Tracking™



## User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2" or 3" paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

# SRP-330II

## 3 inch Thermal POS Printer

### Specifications

#### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

Up to 220 mm/sec

**Print Resolution**

SRP-330II: 180 dpi

SRP-332II: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Cover Open

#### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm

Optional 58 mm (N type)

**Media Roll Diameter**

Up to 80 mm

**Media Thickness**

0.05 ~ 0.08mm

**Supply Method**

Easy Paper Loading

#### Physical Characteristics

**Dimensions (W x D x H)**

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

**Weight**

1.37 kg (3.02 lbs.)

**Electrical**

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (via y-type adaptor)

#### Performance Characteristics

**NV Image Memory**

768 Kbytes (Mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Serial

③ USB V2.0 FS + Parallel

④ USB V2.0 FS + SD

#### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

#### Reliability

**Thermal Print Head (TPH)**

150 km

**Auto Cutter**

1.5 Million Cuts

**\*\*\* Specified Paper**

- TF50KS-E (Paper thickness: 65µm)

: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd

- PD 160R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd.

- P350 (Paper thickness: 62µm)

: Kansaki Specialty Paper, Inc. (USA)

#### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver, OPOS / JPOS Driver,

Linux / Mac CUPS Driver,

Virtual COM USB / Ethernet Driver,

Utility Program

**SDK / Plugin**

Android / iOS / Windows SDK, Linux SDK,

Xamarin SDK, Chrome SDK, Cordova Plugin

**Application**

mPrint App (iOS)

#### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-330II: - Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

**Graphics**

Supporting user-defined fonts, graphics,

formats, and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128,

EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

#### Accessories

**Standard**

2 inch Partition (58 mm), USB A-B Cable 1.8m

**Optional**

External buzzer, B-Melodist

