

PA720MCA Mobile Clinical Assistant

Compact design but powerful, unitech PA720 mobile clinical assistant (MCA) brings performance, durability and speed into a distinctive device. Powered by the latest Android 6.0 operation system and a quad-core processor, this device improves overall stability and delivers unparalleled performance. In addition, PA720MCA is also integrated barcode imaging technology. It is a versatile data collection tool for every need in the enterprise solutions.

Rugged yet Stylish

unitech new PA720MCA gives user a smart phone experience but in a durable package. Built with a sunlight readable 4.7-inch color multi-touch display, this device enhances a Gorilla Glass 3 screen with 7H hardness to keep it scratch free, along with a stylish round edges design at weight of less than 287g (with standard battery), PA720MCA is available to read in direct bright sunlight and it is portable to take around anywhere you go. Besides, engineered with industrial grade materials, this enterprise digital assistant is rugged enough to drop from the 1.5 meters onto concrete and it is available to survive through the harsh environments with its IP65 waterproof and dustproof rating. The PA720MCA is highly reliability to meet the needs in a wide range of mobile workforce.

High Productivity with Superior Performance

When a flexible device is in demand, the PA720MCA provides the Android 6.0 operating system, allowing users to develop in an open source platform with thousands of enterprise grade applications. In addition, PA720MCA is integrated an advanced 64-bit quad-core CPU (1.3GHz) and 3GB RAM and power your business applications. This device is also equipped with an 8 megapixel rear-facing camera that user can capture pictures, video, documents instantly, as well as a 5 megapixel front-facing camera for video communication or self video recording. Featuring superior 1D and 2D barcode reading performance, it ensures read reliability for mobile phone screens and paper in any orientation. The PA720MCA gives your workforce the technology it needs to take your business to the next level.

User-Friendly Functionality

The PA720MCA is constructed for using in physically active environments, such as for field service workers and business-critical applications. In order to be user-friendly, this device is not only built in an easy hot-swap battery design that allows users to change batteries without having to power off the devices, but also is equipped with an zero shutter lag time function that improves the lag between clicking the camera and barcode scanning to speed up the picture taking process. Furthermore, the PA720MCA is implemented the physical function button set (Back, Home, Menu, Camera) and it supports versatile MDM (mobile device management) systems such as Airwatch, SOTI, 12Management and MoboLink which offers a more efficient experience and maximize the productivity in the enterprise.

Features

- White Housing with Antimicrobial Materials for medical institutions
- 4.7" enterprise digital assistant with latest Android 6.0 Marshmallow operation system
- Integrated superior 2D barcode imaging technology and dual cameras
- Unparalleled performance with 64-bit quad-core processor (1.3GHz) and 3GB RAM
- Easy Hot-swap battery design without downtime
- Support versatile MDM systems: Airwatch, SOTI, 12Management and MoboLink
- Robust Pogo pins: Twice longer life cycle compared to Micro USB





PA720MCA Software Solution

Introduction

It's time to make the most of your unitech hardware. Experience a host of software solutions tailored for the needs of your enterprise.


Whether it's managing a deployment of unitech handhelds in the field or using a 3rd party app to unite all of your devices, Unitech can help you get more out of your investment. The possibilities are endless.

unitech also offers customized solutions and software for business needs. Please contact us for more information.



Solutions MoboLink Hyperlink to your mobile devices

Connect your devices to an IoT platform to collect data from devices and exchange with other systems via RESTful APIs. A web management portal enable managing devices and data easily.

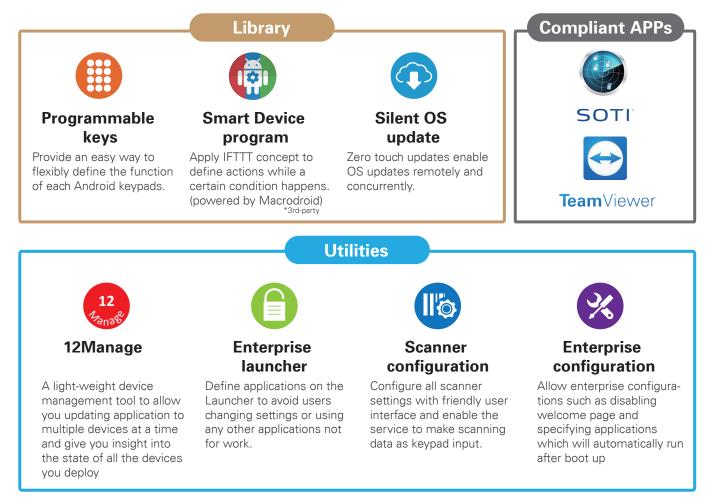

*All trademarks and registered trademarks are the property of their respective owners.







System Features

Memory Expanded slot OS Languages support 1.3GHz Quad Core Processor
3 GB RAM
16 GB Flash
MicroSD, up to 128 GB
Android 6.0
English, Simplified Chinese, Traditional Chinese,
Japanese, Spanish, German, French, Italian,
Portuguese, Korean and multiple languages

Display

CPU

Gorilla Glass 3 with 5-point Capacitive Touch Panel 4.7" Color LCD 1280X720 High Resolution Display

Keypad

4 Function Keys, Push-to-talk key, Volume up/down key, Left/right scan key, Power key

Indicator

3 color LED to indicate charge, scan and message Vibrator

Symbologies

2D Imager Zebra SE4750

UPC-A/E, EAN-8/13, Codabar, Code 39, Code 39 Full ASCI, Code 93, Code 32, Interleaved & Std.

2 of 5, EAN 128, Code 11, MSI/Plessey, Code 128, RSS Expended, RSS Limited, RSS14

2D Barcode

1D Barcode

PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR Code, Micro QR Code, Aztec, MaxiCode, Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal Dutch Postal (KIX)

- Audio

Speaker 85 dB at 10cm, 3.5mm Audio Jack, Receiver, Microphone



Headquaters Taipei, Taiwan http://www.ute.com e-mail: info@hq.ute.com

unitech America Los Angeles http://us.ute.com e-mail: info@us.ute.com http://can.ute.com info@can.ute.com

Mexico http://latin.ute.com e-mail: info@latin.ute.com

unitech Asia Pacific & Middle East ^{Taipei}



Camera and Flash Light Bluetooth Interface USB WLAN RFID/HF 8.0 MP Rear, 5 MP Front camera Bluetooth 4.1 BLE Supported USB 2.0 w/ Pogo Pin USB 2.0 host / client IEEE 802.11 a/b/g/n Frequency: 13.56MHz Tag Support: ISO15693, ISO14443A , ISO14443B Support NFC, SAM slot x1(option)

Power Source

Main Battery

Rechargable Li-ion Battery (Hot Swappable) Typical 3.6V 3220mAh Minimum 3.6V 3120mAh

Enclosure

Weight Dimension

Environmental

Operating temperature Storage temperature Relative Humidity Drop test to Concrete Environmental Sealing Vibration and Shock test

287g

-4°F to 122°F (-20°C to 50°C) -22°F to 140°F (-30°C to 60°C) 5% ~ 95% (Non-Condensing) 1.5 meter IP65 MIL-STD-810G, 514.4 Process II

Regulatory Approvals

CE, FCC, NCC, BSMI, VCCI, TELEC, CCC, SRRC, RoHS compliance

171.3mm x 29.3mm x 80mm

Accessories

4-slot Ethernet Cradle
4-slot Terminal Charging Cradle
1-Slot USB Cradle
1-Slot Ethernet Cradle
USB Holder Cable
Main Battery

unitech Europe Tilburg / Netherlands http://eu.ute.com e-mail: info@eu.ute.com

unitech Japan Tokyo http://jp.ute.com e-mail: info@jp.ute.com

unitech Greater China

Beijing, Shanghai, Guang Zhou, Xiamen http://cn.ute.com info@cn.ute.com Taipei http://tw.ute.com info@tw.ute.com



Specifications subject to change without notice. Copyright 2017 unitech Electronics Co., Ltd. All rights reserved. unitech is a registered trademark of unitech Electronics Co., Ltd. All product and company names are trademarks, service marks, or registered trademarks of their respective owners.

09/17 Rev.A